2-Port 10G SFP+ Network Adapter for OCP 3.0

User Manual

Ver. 1.00

All brand names and trademarks are properties of their respective owners.

Contents:

Chapter 1: Introduction 3
1.1 Product Introduction 3
1.2 Features 3
1.3 Requirements 4
1.4 Product Diagram 4
1.5 Package Contents 5
Chapter 2: Getting Started 5
2.1 Hardware Layout 5
2.2 Hardware Installation 6
2.3 Driver Installation 7
2.3.1 Installation for Windows 7
2.3.2 Installation for Linux 7
2.4 Verifying the installation 7
2.4.1 Verifying for Windows 7
2.4.2 Verifying for Linux 8

Chapter 1: Introduction

1.1 Product Introduction

This 2-Port 10G SFP+ OCP 3.0 Network Adapter provides two SFP+ ports for network connection of data rate up to 10Gbps. By using Intel's 700 series Ethernet controller, the adapter is designed to optimize system workloads for Cloud, Communications and High Performance Computing applications.

1.2 Features

- PCIe Gen3 x8 host interface
- Compliant with OCP NIC 3.0 specification
- Supports 4C+ connector
- Supports OCP 3.0 scan chain, FRU NVM and NC-SI
- OCP 3.0 SFF form factor with Pull Tab (Internal Lock option by demand)
- Supports 10GBASE-SR/LR and DAC modules
- Supports PXE and UEFI preboot
- OCP 3.0 NIC Small Form Factor (SFF) module
- Provides two SFP+ ports for multiple high-speed connections

- DDP and DPDK performance optimization technologies
- Supports IEEE1588 PTP v2 Precision Time Protocol
- Supports various Virtualization offloading

1.3 Requirements

- Windows: 10/11/Server 2012/2012 R2/2016/2019/2022
- Linux: RHEL 7.x/8.x/9.1/9.2, SLES 12/15, Ubuntu 18.x LTS/20.x LTS/22.x LTS, Debian 11
- FreeBSD 11.3/12.x/13

1.4 Product Diagram




1.5 Package Contents

- 1 x 2-Port 10G SFP+ Network Adapter for OCP 3.0
- 1 x User Manual

Chapter 2: Getting Started

2.1 Hardware Layout

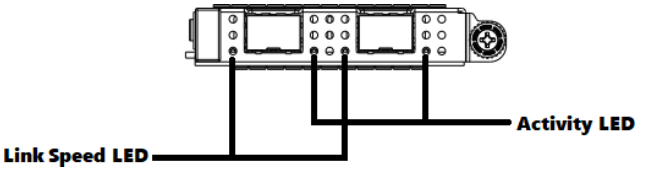

Link/Activity Indicator:

LED	Description
Link Speed LED	Indicates Link Speed: • Green = 10Gbps • Amber = 1Gbps • Off = No Link
Activity LED	Indicates Network Card Activity: • Solid Green = Network port is connected • Flashing Green = Network port is active

2.2 Hardware Installation

1. Turn off the power to your computer.
2. Unplug the power cord.
3. Remove the slot bracket from the available OCP slot.
4. To install the OCP, carefully align the card's bus connector with the selected OCP slot on the motherboard. Push the OCP firmly into themotherboard.
5. Reconnect the set screws of the OCP card bracket to secure the card.
6. Reconnect the power cord.

2.3 Driver Installation

The following section shows you how to install 2-Port 10G SFP+ Ethernet Adapter for OCP 3.0 driver on different operating systems.

2.3.1 Installation for Windows

1. Go to URLhttp://www.sunrichtech.com.hk/
2. Search N-900, download the driver.
3. Follow the on-screen instructions to finish installing the driver.

2.3.2 Installation for Linux


1. Go to URL http://www.sunrichtech.com.hk/
2. Search N-900, download the driver.
3. Follow Readme.txt which is in the driver folder tofinish installing the driver.

2.4 Verifying the installation

2.4.1 Verifying for Windows

1. Click on the **"Device Manager"** tab in the Windows ControlPanel.

Start > Control Panel > Device Manager

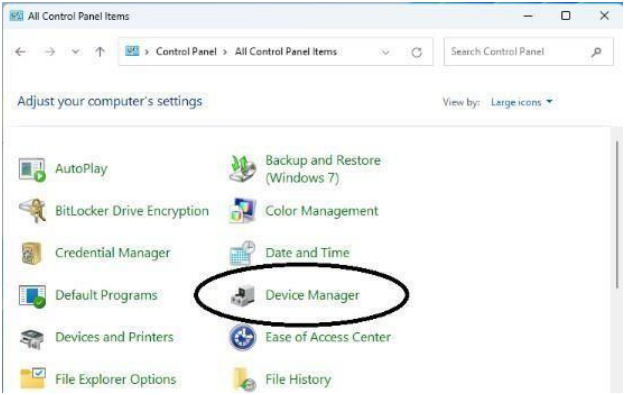

2. Expand **"Network adapters"** item, and you can read **"Intel(R)Ethernet Converged Network Adapter X710"** in the DeviceManager.



2.4.2 Verifying for Linux

1. You can check whether the driver is loading by using following commands:

```
# lsmod | grep i40evf-x.x.x
# ifconfig -a
```

If there is a device name, ethX, shown on the monitor, the linux driver is load. Then, you can use the following command to activatethe ethX.

ifconfig ethX up, where X=0,1,2,…